

WeeFixX™

MAZBOOT BANDHAN MAZBOOT NIRMAN

A CONSTRUCTION CHEMICAL COMPANY



ULTIMATE SOLUTION
FOR TILING &
GROUTING



www.weefixinfra.com

WeeFixX™

MAZBOOT BANDHAN MAZBOOT NIRMAN

WeeFixX, a trusted name in the tile fixing industry, operates with a passion for excellence and innovation, we specialize in producing high-quality tile adhesives, grouts, waterproofing & wallcare products that meet the diverse needs of modern construction and design projects.

At WeeFixX, we blend advanced technology with industry expertise to create adhesive solutions that ensure durability, strength, and precision. Whether it's residential, commercial, or industrial applications, our products are designed to deliver unmatched performance and reliability.



WeeFixX “Mazboot Bandhan Mazboot Nirman”

What We Offer

- **Premium Quality Adhesives:** Engineered for various tiles, including ceramic, porcelain, marble, and granite.
- **Advanced Technology:** Our adhesives are formulated using cutting-edge technology to ensure superior bonding strength, flexibility, and durability, even in high-stress environments.
- **Eco-Friendly Solutions:** Committed to sustainable manufacturing practices and environmentally friendly products.
- **Customer Support:** Expert guidance and technical support to ensure successful installation and application.

vision

To revolutionize the tile adhesive industry by delivering innovative, eco-conscious solutions that redefine quality and performance. We aim to empower construction and design professionals with cutting-edge products that inspire creativity, enhance durability, and contribute to building a better, greener future.



Why Choose Us?

With a focus on innovation, quality, and customer satisfaction, WeeFixX has become a preferred partner for architects, contractors, and designers. Trust us to provide reliable solutions that bring your tile installations to life.

INTERIOR AND EXTERIOR APPLICATIONS

WeeFixX 2K Tile Adhesive
For Bathroom & Kitchen Walls

1

WeeFixX 1K Tile Adhesive
For Bathroom & Kitchen Floor Tiles

2

WeeFixX 3k Tile Adhesive
For Drawing Room Wall Tiles/Stones

3

WeeFixX Tile Grout / Epoxy Grout
For Grouting

4

WeeFixX WT2 Tile Adhesive
Ceramic Tiles/Stones on Floor

5

WeeFixX Epoxy Grout
For Grouting

6

WeeFixX 4k Tile Adhesive
For Glass Mosaics Tiles in Swimming Pool

7

WeeFixX Epoxy Grout
For Swimming Pool Grouting


8

WeeFixX 3k/4k Tile Adhesive
For Exterior Stone Fixing

10

WeeFixX 3K/4k Tile Adhesive
For Exterior Natural Stone

9

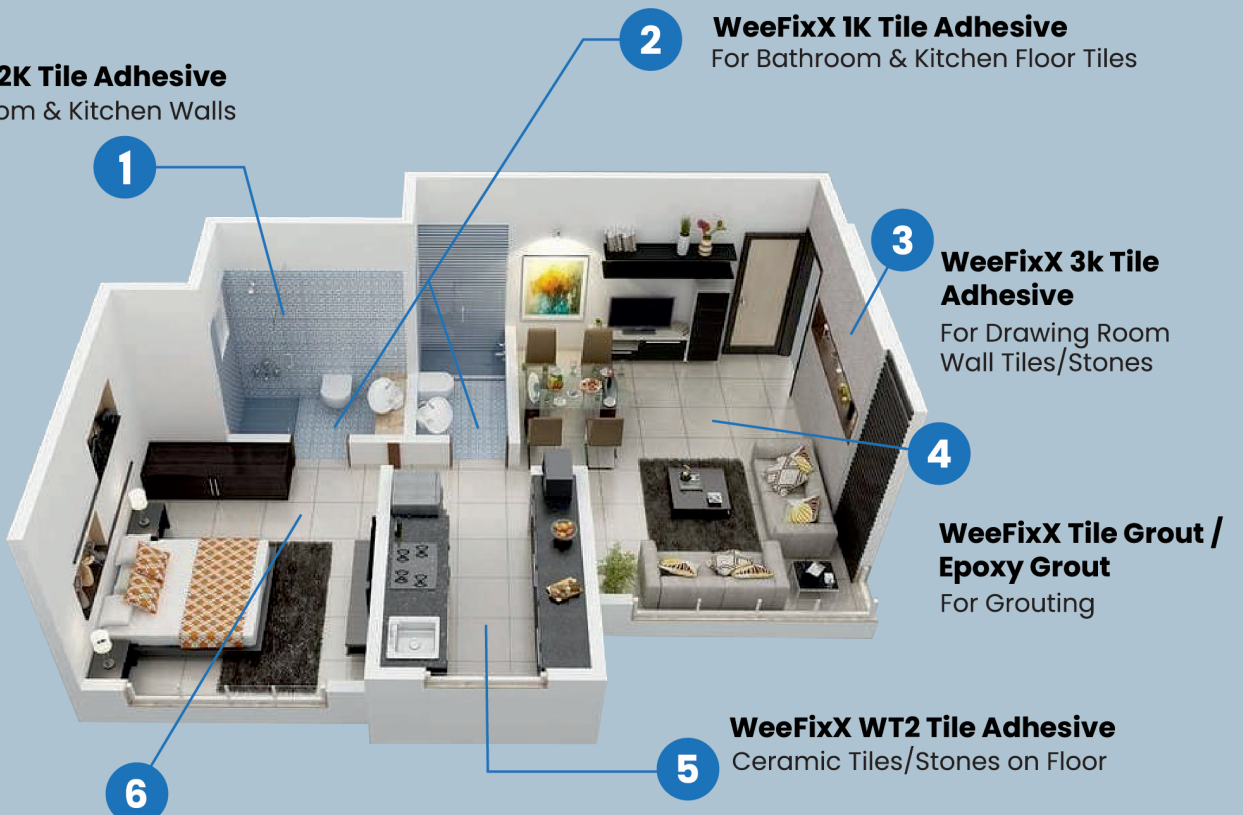

TILE AND STONE FIXING

WeeFixX WT1 SLIP RESISTANT TILE ADHESIVE

WeeFixX WT1 Tile Adhesive is a polymer modified grey adhesive for fixing of ceramic tiles on internal floor and walls for dry area. It is water resistant and does not allow cracking of tiles.



Technical details:

PACK SIZE **20 Kg.**

CONFORMS TO IS 15477-2004	Coverage	Tensile Adhesion Annex A (Clause 5.1)	Shear Adhesion Annex B (Clause 5.2)	Slip Resistance Annex E (Clause 5.5)	Minimum Bed Thickness required
TYPE-1 T	Approx 45-55 sq. ft per 20kg bag	0.6-0.7 N/mm ²	1.1-1.2 N/mm ²	0.40-0.45 mm	3 mm using 6mmx6mm Notched trowel


*Actual Coverage depends on substrate condition & method of application

Shelf Life: 12 months from the date of manufacturing, Stored in a original sealed sacks in a dry and closed place.

WeeFixX WT1 Tile Adhesive Complies to IS 15477:2019 'Type 1T' & EN 12004 'C1' Classification.

WeeFixX 1K SLIP RESISTANT TILE ADHESIVE

WeeFixX 1K is a polymer modified grey adhesive for fixing of ceramic tiles on internal floor and walls. Its usage extends to Ceramic, fully vitrified, Terracotta, bricks & Porous Stones/Tiles as well. It is water resistant and does not allow cracking of tiles.

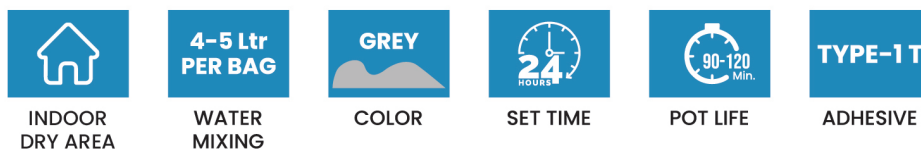

Technical details:

PACK SIZE **20 Kg.**

CONFORMS TO IS 15477-2004	Coverage	Tensile Adhesion Annex A (Clause 5.1)	Shear Adhesion Annex B (Clause 5.2)	Slip Resistance Annex E (Clause 5.5)	Minimum Bed Thickness required
TYPE-1 T	Approx 45-55 sq. ft per 20kg bag	0.6-0.7 N/mm ²	1.1-1.2 N/mm ²	0.40-0.45 mm	3 mm using 6mmx6mm Notched trowel

*Actual Coverage depends on substrate condition & method of application

Shelf Life: 12 months from the date of manufacturing, Stored in a original sealed sacks in a dry and closed place.

WeeFixX 1K Tile Adhesive Complies to IS 15477:2019 'Type 1T' & EN 12004 'C1T' Classification.

TILE AND STONE FIXING

WeeFixX 2K SLIP RESISTANT TILE ADHESIVE

WeeFixX 2K Tile Adhesive is a polymer modified adhesive for fixing of Ceramic, fully vitrified, Terracotta, bricks, Glass Mosaic Tiles, terrazzo & Porous Stones as well. Its application extends to interior floors/walls & exterior floor. It is water resistant and does not allow cracking of tiles.



INDOOR
DRY & WET
AREA



4-5 Ltr
PER BAG



GREY/
WHITE



SET TIME



POT LIFE



ADHESIVE



Technical details:

PACK SIZE 20 Kg.

CONFORMS TO IS 15477-2004	Coverage	Tensile Adhesion Annex A (Clause 5.1)		Shear Adhesion Annex B (Clause 5.2)			Slip Resistance Annex E (Clause 5.5)	Minimum Bed Thickness required
		Dry Condition	Wet Condition	Dry Condition	Wet Condition	Heat Ageing		
TYPE-2 T	Approx 45-55 sq. ft per 20kg bag	1.05-1.20 N/mm ²	1.05-1.20 N/mm ²	1.25-1.40 N/mm ²	1.10-1.20 N/mm ²	1.05-1.15 N/mm ²	0.30-0.45 mm	3 mm using 6mmx6mm Notched trowel

*Actual Coverage depends on substrate condition & method of application

Shelf Life: 12 months from the date of manufacturing, Stored in a original sealed sacks in a dry and closed place.
WeeFixX 2K Tile Adhesive Complies to IS 15477:2019 'Type 2T' & EN 12004 'C2T' Classification.

WeeFixX WT2 SLIP RESISTANT TILE ADHESIVE

WeeFixX WT2 Tile Adhesive is a polymer modified adhesive for fixing of Ceramic, fully vitrified, Terracotta, bricks, Glass Mosaic Tiles, terrazzo & Porous Stones as well. Its application extends to interior floors/walls & exterior floor. It is also formulatted for fixing natural stone in door frame & window frame. It is water resistant and does not allow cracking of tiles.



INDOOR
DRY & WET
AREA



4-5 Ltr
PER BAG



GREY/
WHITE



SET TIME



POT LIFE



ADHESIVE



Technical details:

PACK SIZE 20 Kg.

CONFORMS TO IS 15477-2004	Coverage	Tensile Adhesion Annex A (Clause 5.1)		Shear Adhesion Annex B (Clause 5.2)			Slip Resistance Annex E (Clause 5.5)	Minimum Bed Thickness required
		Dry Condition	Wet Condition	Dry Condition	Wet Condition	Heat Ageing		
TYPE-2 T	Approx 45-55 sq. ft per 20kg bag	1.05-1.20 N/mm ²	1.05-1.20 N/mm ²	1.25-1.40 N/mm ²	1.10-1.20 N/mm ²	1.05-1.15 N/mm ²	0.30-0.45 mm	3 mm using 6mmx6mm Notched trowel

*Actual Coverage depends on substrate condition & method of application

Shelf Life: 12 months from the date of manufacturing, Stored in a original sealed sacks in a dry and closed place.

WeeFixX WT2 Tile Adhesive Complies to IS 15477:2019 'Type 2T' & EN 12004 'C2T' Classification.

TILE AND STONE FIXING

WeeFixX 3K SLIP RESISTANT TILE ADHESIVE

WeeFixX 3K Tile Adhesive is a highly polymer modified adhesive for fixing of large format of ceramic, vitrified, Terracotta, Glass Mosaic Tiles, porcelain, basalt & natural stone cladding as well. Its application extends to interior & exterior floor & walls. Excellent for wet areas like swimming pool, sauna, water bodies etc. It is water resistant and does not allow cracking of tiles.



DRY & WET
INDOOR/
OUTDOOR



4-5 Ltr
PER BAG



COLOR



SET TIME



POT LIFE



ADHESIVE



Technical details:

PACK SIZE 20 Kg.

CONFORMS TO IS 15477-2004	Coverage	Tensile Adhesion Annex A (Clause 5.1)		Shear Adhesion Annex B (Clause 5.2)			Slip Resistance Annex E (Clause 5.5)	Minimum Bed Thickness required
		Dry Condition	Wet Condition	Dry Condition	Wet Condition	Heat Ageing		
TYPE-3 T	Approx 45-55 sq. ft per 20kg bag	1.50-1.65 N/mm ²	1.10-1.20 N/mm ²	1.60-1.70 N/mm ²	1.15-1.25 N/mm ²	1.10-1.20 N/mm ²	0.40-0.45 mm	3 mm using 6mmx6mm Notched trowel

*Actual Coverage depends on substrate condition & method of application

Shelf Life: 12 months from the date of manufacturing, Stored in a original sealed sacks in a dry and closed place.

WeeFixX 3K Tile Adhesive Complies to IS 15477:2019 'Type 3T' & EN 12004 'C2TES1' Classification.

WeeFixX 4K SLIP RESISTANT TILE ADHESIVE

WeeFixX 4K Tile Adhesive is a highly polymer modified adhesive for fixing of large format of all tiles, plaster board, concrete surfaces and stones. Its application can be extended to highly diversified uses, material and surfaces. Excellent for elevation purposes and heavy exterior requirement.



DRY & WET
INDOOR/
OUTDOOR



4-5 Ltr
PER BAG



COLOR



SET TIME



POT LIFE



ADHESIVE



Technical details:

PACK SIZE 20 Kg.

CONFORMS TO IS 15477-2004	Coverage	Tensile Adhesion Annex A (Clause 5.1)		Shear Adhesion Annex B (Clause 5.2)			Slip Resistance Annex E (Clause 5.5)	Transverse Deformation	Minimum Bed Thickness required
		Dry Condition	Wet Condition	Dry Condition	Wet Condition	Heat Ageing			
TYPE-4 T S1	Approx 45-55 sq. ft per 20kg bag	1.70-1.80 N/mm ²	1.50-1.60 N/mm ²	1.80-1.90 N/mm ²	1.30-1.40 N/mm ²	1.20-1.30 N/mm ²	0.30-0.45 mm	2.55-2.65 mm	3 mm using 6mmx6mm Notched trowel

*Actual Coverage depends on substrate condition & method of application

Shelf Life: 12 months from the date of manufacturing, Stored in a original sealed sacks in a dry and closed place.

WeeFixX 4K Tile Adhesive Complies to IS 15477:2019 'Type 4T' & EN 12004 'C2TES1' Classification.

GROUT - CEMENTITIOUS & EPOXY

WeeFixX EPOXY GROUT

WeeFixX Epoxy Grout is a three-component, high strength, stain proof epoxy tile grout especially formulated for filling gaps and joints between tiles like ceramic, vitrified and stones, which are prone to staining in wet areas like bathrooms, swimming pools, kitchens, fountains, factories, warehouses, hospitals, labs, commercial & residential buildings etc.. It provides stain proof, dust proof, chemical resistant, hard wearing joints.



STAIN PROOF & EASY TO CLEAN



NON-CRACKING & POWDERING



CURING TIME



POT LIFE



CHEMICAL RESISTANCE



AVAILABLE IN VARIOUS SHADES



Technical details:

PACK SIZE

1 Kg. & 5 Kg.

Color	Compression Strength		Flexural Strength		Shrinkage 24 Hrs	Water Absorption, 4 Hrs
	Dry Condition	Freeze-Thaw Condition	Dry Condition	Freeze-Thaw Condition		
Part A (Resin): White Paste Part B (Hardener): Pale Yellow Liquid Part C (Filler Powder): Various Shades	45 - 50 N/mm ²	40 - 45 N/mm ²	30 - 35 N/mm ²	25 - 30 N/mm ²	1.0 - 1.5 mm/m	0.010 - 0.050 g

*Refer consumption chart and shade options given in application guide at page no. 9

Shelf Life: 24 months from the date of manufacturing, Stored in a original sealed bucket in a dry and closed place.



WeeFixX POLYMER TILE GROUT

WeeFixX Polymer Tile Grout is a premium unsanded grout, carefully prepared with chemical, additives and fillers. Ideal for both floors and walls with a wide array of applications, including Ceramic, Vitrified, Terracotta, natural stone and porcelain. Easy to install tile grout, just need to add water.



INDOOR/ OUTDOOR USAGE



CAN FILL THE JOINTS 1mm-3mm.



SMOOTH FINISH



EASY TO APPLY AND CLEAN



AVAILABLE IN MORE THAN 15 COLORS



WEATHER FINISH



Technical details:

PACK SIZE

1 Kg.

Joint width	Pot Life	Compression Strength	Flexured Strength	Shrinkage	Water Absorption
upto 3mm	90-120 mins.	≥ 15 N/mm ²	≥ 2.5 N/mm ²	< 3 mm/mm ²	≤ 5gm

*Actual Coverage depends on substrate condition & method of application

Shelf Life: 24 months from the date of manufacturing, Stored in a original sealed pack in a dry and closed place.



SHADE OPTIONS

WHITE		ENGRASS		CHROME YELLOW	
ANTIQUÉ WHITE		MILD GREEN		TERRA RED	
GREY		MENTA		BLUE	
PLATINUM GREY		WHISPERING GREEN		ALPINE BLUE	
STERLING SILVER		LIGHT GREEN		DEEP DESIRE	
CEMENT		SETERN		DARK BLUE	
SANDSTONE		ALPINO		PURPLE RAIN	
MOCHA		DARK GREEN		FANCY COCOA	
COPPER BROWN		DEEP LINE		RAVEN	
MUSHROOM		BABY PINK		BLACK	
MOLTEN BRONZE		BURGANDY			
YELLOW		METAALE			
YELLOW ROSE (BASIC)		RED			

CONSUMPTION OF EPOXY BASED TILE GROUT IN (kg/m²)

TILE DIMENSION (mm)			MIX DENSITY OF TILE GROUT ~> 1.6 kg/litre							
L(mm)	B(mm)	T(mm)	JOINT SIZE-J(mm)							
			2mm	3mm	4mm	5mm	6mm	8mm	10mm	12mm
25	25	6	1.54	2.30	3.07	3.84	4.61	6.14	7.68	9.22
25	50	6	1.15	1.73	2.30	2.88	3.46	4.61	5.76	6.91
50	50	6	0.77	1.15	1.54	1.92	2.30	3.07	3.84	4.61
100	100	6	0.38	0.58	0.77	0.96	1.15	1.54	1.92	2.30
100	100	10	0.64	0.96	1.28	1.60	1.92	2.56	3.20	3.84
300	200	6	0.16	0.24	0.32	0.40	0.48	0.64	0.80	0.96
300	300	6	0.13	0.19	0.26	0.32	0.38	0.51	0.64	0.77
450	300	6	0.11	0.16	0.21	0.27	0.32	0.43	0.53	0.64
600	300	6	0.10	0.14	0.19	0.24	0.29	0.38	0.48	0.58
600	600	8	0.09	0.13	0.17	0.21	0.26	0.34	0.43	0.51
800	800	8	0.06	0.10	0.13	0.16	0.19	0.26	0.32	0.38
1000	1000	10	0.06	0.10	0.13	0.16	0.19	0.26	0.32	0.38
1200	600	10	0.08	0.12	0.16	0.20	0.24	0.32	0.40	0.48
1200	800	10	0.07	0.10	0.13	0.17	0.20	0.27	0.33	0.40
1200	1200	12	0.06	0.10	0.13	0.16	0.19	0.26	0.32	0.38
1600	800	12	0.07	0.11	0.14	0.18	0.22	0.29	0.36	0.43
1800	1200	12	0.05	0.08	0.11	0.13	0.16	0.21	0.27	0.32

The Quantities shown are approximate and are given for estimating purposes only. Actual job site coverage may vary from site to site or the method of application.

Coverage: Depends on the depth and width of joint. Consumption can be calculated by formula Grout consumption in Kg/M² -
$$\frac{(\text{length of tile} + \text{width of tile}) \times \text{depth of joint} \times \text{width of joint} \times \text{density}}{(\text{length of tile} + \text{width of joint}) \times (\text{width of tile} + \text{width of joint})}$$

Note: It is always good practice when calculating coverage to allow for 10% additional material for waste and spillage.

WATERPROOFING

WeeFixX SBR LATEX BOND

WeeFixX SBR Latex Bond cementitious Waterproofing & repair polymer Solution is a ready-to-use styrene butadiene rubber liquid for repairing concrete and waterproofing bathrooms, terraces, and more. It provides strong adhesion, reduces shrinkage, prevents cracks, improves abrasion resistance, and enhances overall structural durability.



**STRONG
ADHESION**



**CRACK
RESISTANCE**



**DURABLE
BONDING**



**WATERPROOF
FORMULA**



PACK SIZE 1 Kg. & 5 Kg.

Technical details:

PARAMETERS	RESULTS
APPEARANCE & BASE	SBR LATEX MODIFIED VISCOUS LIQUID
COLOR	MILKY WHITE
SPECIFIC GRAVITY	1.10 ± 0.02 KG/L
PH	9±1
SOLIDS	≥ 45%
COMPRESSIVE STRENGTH	≥ 40.0 N/MM ² @ 28 DAYS ("SPECIFIC MIX DESIGN)
BOND STRENGTH	≥ 4.50 N/MM ²
TENSILE STRENGTH	≥ 3.50 N/MM ²
ADHESION TO CONCRETE	≥ 2.1 N/MM ² (CONCRETE FAILURE)
WATER RESISTANCE	UP TO 3 BAR PRESSURE

WEEFIXX 2K UMBRELLA PROTECT

WeeFixX 2K Umbrella Protect is elastomeric waterproof & protective coating with Two component, flexible polymer modified cementitious coating for the protection and waterproofing of concrete surfaces, balconies, terraces, bathrooms and swimming pools.

Protection of concrete surfaces which may come into contact with sea water, de-icing salts, such as sodium or calcium chloride, and sulphates. Advantages Economical and cost effective waterproofing system.



**STRONG
ADHESION**



**CRACK
RESISTANCE**



**DURABLE
BONDING**



**WATERPROOF
FORMULA**



PACK SIZE Part A 10 Kg.
Part B 5 Kg.

Technical details:

PROPERTIES	SPECIFICATION
PACK	15 KG
COLOUR OF MIX	GREY.
MIXING RATIO	COMP. A POWDER : COMP. B LIQUID (2:1)
CONSISTENCY	BRUSHABLE (APPLIED BY BRUSH)
APPLICATION TEMPERATURE RANGE	5° C TO 40° C
SET-TO-TOUCH TIME	40 MINUTES
ELONGATION	40%
TENSILE STRENGTH	1.5 N/MM ²
ADHESION TO CONCRETE	1.2 N/MM ²
ADHESION TO SUBSTRATE	0.55 N/MM ²

WeeFixX PLASTER BOND

WeeFixX Plaster Bond is a premium green bonding agent that replaces the old method of hacking, ensuring strong plaster adhesion to smooth surfaces like concrete and RCC. Easy to apply with a brush or roller, it's ideal for modern construction and long-lasting surface bonding.



APPLIED ON ANY CONCRETE SURFACE



READY TO USE



MAKE IDENTIFICATION EASY



DUAL BONDING



Technical details:

DRY TIME	24 HRS. (DEPENDS ON WEATHER)
APPEARANCE	GREEN
BONDING STRENGTH	18X-20X THAN CONVENTIONAL HACKING
TYPE	COLLOIDAL SOLUTION WITH SUSPENDED SOLIDS
CHEMICAL COMPOSITION	POLYMER BASED LIQUID
APPLICATION TOOL	BRUSH OR ROLLER
DENSITY (KG/M ³)	1600-1650

PACK SIZE

5 Kg. & 20 Kg.

Coverage 1 Kg Covers, 45-50 Sq.ft. Area

Storage & Shelf Life 12 Months from the date of manufacturing when stored in dry conditions.

WeeFixX ReadyMix Plaster

WeeFixX Ready Mix Plaster is a polymer-modified, ready-to-use plaster made from 53-grade OPC cement (Grey). It provides excellent adhesion, water resistance, and a smooth, crack-free finish for internal and external walls - offering a perfect base for painting while ensuring faster, durable construction.



LESS CURING & WASTAGE



FOR INTERIOR & EXTERIOR WALLS



DOUBLE PACKAGING



MADE WITH OPC 53 GRADE CEMENT



Technical details:

BULK DENSITY	1500 - 1600KG / (M ³)
COMPREHENSIVE STRENGTH	14.9N / M * M ²
BOND STRENGTH	0.55 N/MM
POT LIFE	260-70 MINUTES
WATER POWDER RATIO	20-22% BY WEIGHT
WATER CURING	2-3 TIMES FOR 2-3 DAYS
DRY DENSITY	1900 - 1950KG / (M ³)
APPEARANCE	GREY

PACK SIZE

40 Kg.

Coverage 40 Kg Covers, 10-12 Sq.ft. With Thickness Upto 15mm

Storage & Shelf Life 12 Months from the date of manufacturing, provided the original unopened packaging is stored in dry conditions

WeeFixX BLOCK ADHESIVE

WeeFixX Block Joining Mortar is a premium, ready-to-use adhesive formulated for AAC blocks, fly ash bricks, and concrete blocks. It ensures strong, durable bonding, replaces traditional mortar, and enables faster construction with superior finish, reduced material wastage, and minimal effort.



CONSTRUCTION
ACCURACY



HIGH
STRENGTH



LESS STORAGE
SPACE



SELF
CURING



Technical details:

PACK SIZE

40 Kg.

THICKNESS	3 MM
WATER RATIO	9-9.5 LITRE
BULK DENSITY (KG/M3)	1600-1650
WASTAGE	NIL
BOND STRENGTH (N/MM2)	1-1.25
APPEARANCE	GREY
POT LIFE (IN MIN)	70-75
COMPRESSIVE STRENGTH (N/MM2)	10-12

Coverage 40 Kg Covers, 130-150 Sq.ft. Area

Storage & Shelf Life 12 MONTHS from the date of manufacturing, provided the original unopened packaging is stored in dry conditions

WeeFixX™

MAZBOOT BANDHAN MAZBOOT NIRMAN
A CONSTRUCTION CHEMICAL COMPANY

Manufactured by:

WEEFIXX INFRA SOLUTIONS LLP

E1004, Amit Bloomfield, Ambegaon BK, Pune 411046.

Contact : +91 98239 45595

www.weefixxinfra.com
weefixxcare@gmail.com

CIN : ACP-5776
GST : 27A AFFW2946Q1ZD



IS 15477:2019